



Last selected vehicle - Focus 2004.75 (07/2004-)

TECHNICAL SERVICE BULLETIN

No.63/2004
06 September 2004

[Printable HTML page]

Circulate to:	Service Manager	Body Shop Manager	Parts Manager	Foremen	Receptionists	Technicians

(c)2004 Ford Motor Company Limited. Eagle Way, Brentwood, Essex CM13 3BW, United Kingdom.

This bulletin represents technical service information only. Without exception all gratis repairs and replacements are subject to the individual warranty and policy procedures of the supervisory Ford Company. The illustrations, technical information, data and descriptive text in this issue, to the best of our knowledge, were correct at the time of publication.

Subject/Concern: Installation of Isofix mounting set and child safety seat**Model:**

Focus 2004.75 (07/2004-)

Build Date: 07/2004- Onwards

Build Code: 4D Onwards

Markets: All**Section:** 501-20A**Summary**

This TSB contains the required steps for the installation of the Isofix mounting set. In order to install the Isofix child safety seat, the anchors under the relevant rear seat must be accessible and an additional Isofix bracket must be installed on the floor pan using two bolts.

Parts Required

Description	Finis Code	Quantity
Isofix mounting set		
Isofix mounting set consisting of:	1 350 704	1
Isofix bracket	1	
Bolt	2	
Rear seat panel	2	
Decal, upper fastening strap	1	

Labor Time

Operation Description	Operation No.	Time
Isofix Mounting Set - Install	39 433 0	-



Repair/Claim Coding

OASIS 101000, 104000


Service Instruction

See Summary.


Installing Isofix mounting set and child safety seat

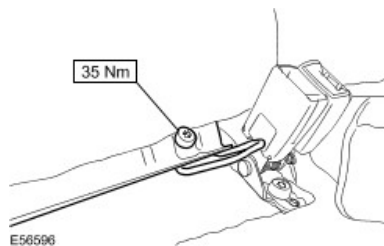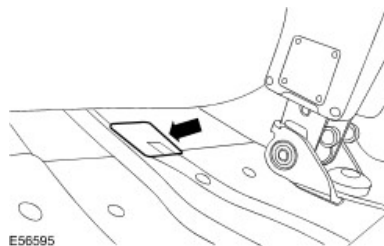


1. Fold up the relevant rear seat cushion.
2. Remove the dummy plugs from the floor pan (two off).
 - Retain the dummy plugs for possible future re-conversion.
3. Attach the Isofix bracket using two bolts (see "Parts Required") (right-hand side shown).
4. Fold back the rear seat cushion.
5. Engage the rear seat panel (see "Parts Required") to the link rod of the Isofix bracket.

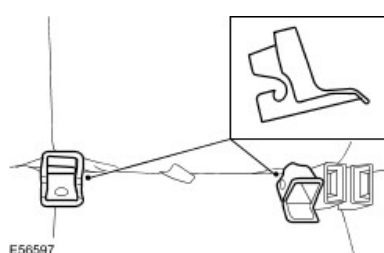

E56597

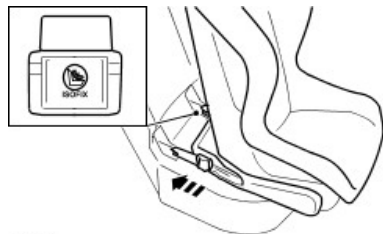

E56598

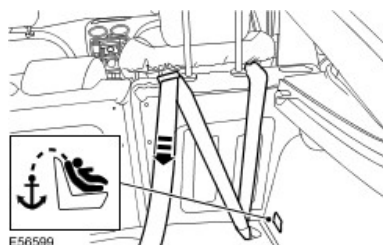

E56599

6. NOTE: Observe the installation instructions in the relevant Isofix child safety seat owner's handbook.

Install the Isofix child safety seat.

- Install the Isofix child safety seat ensuring that both catch arms clearly **audibly** engage.
- Push **both sides** of the child safety seat evenly towards the rear, against the backrest.
- Check the **colored engaging indicators** on the child safety seat.
- Make sure that **both** catch arms are engaged by **pulling on both sides** of the child safety seat.

7. Attach the upper fastening strap to the anchor point on the floor pan.

- Pull the fastening strap tight.
- Attach the upper fastening strap decal (see "Parts Required") to the relevant luggage compartment trim panel.

©Copyright, Ford Motor Company 1994 - 2008 | [Privacy Policy](#)